

Mega Cap Nail

Sizes & Quantities:

Shank Length	Shank Gage	Fastening Range Max. Total Thickness	Required Deck Penetration Plywood	Required Deck Penetration Wood	Pieces/Box*	Pounds/Box
1 1/4"	11	1/16"	*note	1"	1000	16

*Note: The nail must pass through the plywood by 1/4"

*Approximate

Design Options:

Shank Types	Coating	Container	Cap Diameter
Annular Grooved	Galvalum	boxes	1 5/8"

- "Original" capped roofing nail with large 1 5/8" head, *doubles the rupture value.*
- Use *fewer* mega cap nails to achieve the same rupture performance as standard cap nails, resulting in less holes in base sheet membrane..
- Ring shanks for additional pull out resistance
- *Easy installation* with stand up tool or hand hammer
- Round head will not puncture roof membrane
- Fast, *affordable* and strong
- *Corrosion resistant* material (Galvalume AZ55)
- Nail is always centered in cap, unlike tin tabs where the nail is off center, which will greatly lower the rupture value.
- Cap is reinforced under the head to provide additional strength



Patent Pending

Approvals:

American Plywood Associa
FFN-105b Type II, Style 20

Metro Dade County



Made in the U.S.A.


Rupture Value Results:

Average Rupture Values (lbs.)	30 lbx. Roofing Felt
1" Round Metal Cap Nail	43.6
1 5/8" Round Metal Cap Nail	89.9

Tested by Exterior Research & Design, L.L.C., Inc.
In compliance to PA-117 (b)

Pullout Results:

Average Pullout Resistance (lbs.)	Annular Grooved
1/2" Plywood	155
3/4" Plywood	224
2" Pine Plank	190

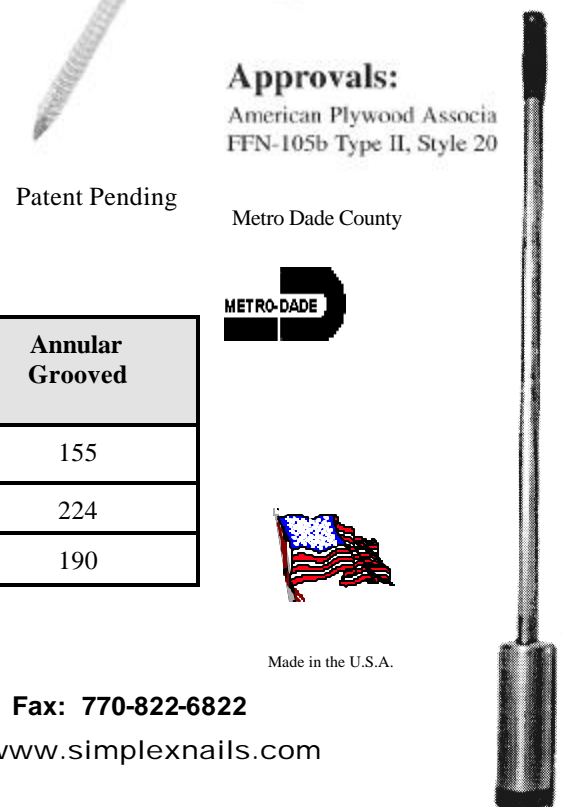

Simplex Nails, Inc. 800-622-3354 Fax: 770-822-6822

100 Petty Road, Suite A * Lawrenceville, GA 30043 * www.simplexnails.com